




*A brushcutter (also called a brushsaw or clearing saw) is a powered garden or agricultural tool used to trim weeds, small trees, and other foliage not accessible by a lawn mower or rotary mower.*

Model	<b>HZ 328</b>
Discharging Capacity	<b>30.5 cc</b>
Standard Power	<b>0.81 kw / 7500 rpm</b>
Tank Capacity	<b>2.0 L</b>
Weight	<b>9.5 kg</b>

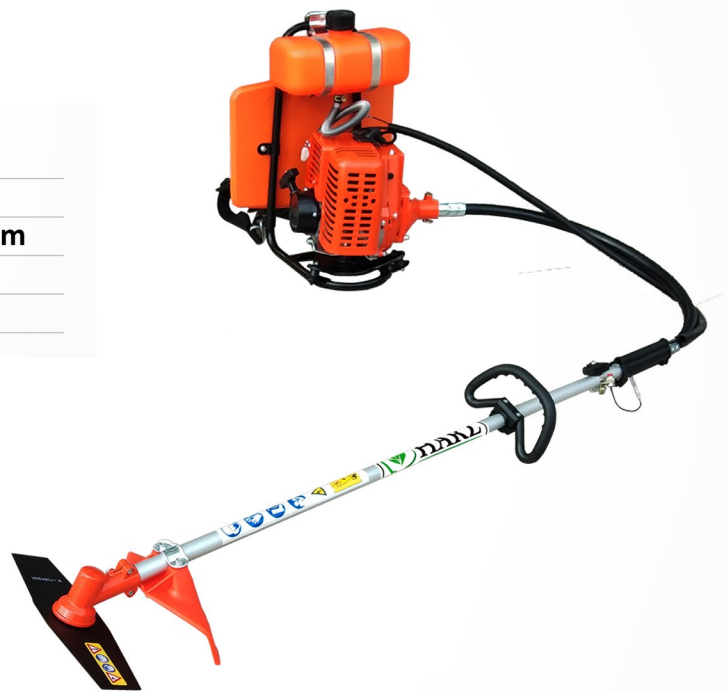

Model	<b>HZ 1016</b>
Discharging Capacity	<b>30.5 cc</b>
Standard Power	<b>0.81 kw / 7500 rpm</b>
Tank Capacity	<b>1.2 L</b>
Weight	<b>10 kg</b>





Model	HZ 33	HZ 43
Discharging Capacity	32.6 cc	42.7 cc
Standard Power	0.95 kw / 7500 rpm	1.25 kw / 7500 rpm
Tank Capacity	1.2 L	1.2 L
Weight	10 kg	11 kg

## HAND PUSH BRUSH CUTTER

Model	<b>HZ-1021-430</b>
Engine	<b>1E40F-50G</b>
Power	<b>1.25 kw / 6500 rpm</b>
Displacement	<b>42.7 ml</b>
Mixed Fuel Ratio	<b>25:1 ~ 50:1</b>
Cutting Width - Blade	<b>255 mm</b>
Cutting Width - Nylon	<b>415 mm</b>
Tank Capacity	<b>1.2 L</b>
Method of Starting	<b>Recoil Starting</b>
Weight	<b>14.5 kg</b>



## HEDGE TRIMMER

Model	<b>HZ-1410</b>
Engine	<b>1E32FL</b>
Power	<b>0.65 kw / 7500 rpm</b>
Displacement	<b>22.5 ml</b>
Cutting Width	<b>600 mm</b>
Scissor Type	<b>Dual Back &amp; Forth</b>
Weight	<b>5.6 kg</b>



- # New Design
- # High Reliability & Toughness
- # Greatly Improved Easy Starting
- # Minimal Vibration
- # Easy Maintenance
- # Original Engine & Parts
- # High Engine Performance
- # Japan Quality & Standard
- # No.1 Recoil Starter (MADE IN JAPAN)



1.7 Horse Power



6 Months Warranty\*\*



Easy Start



No.#1 Recoil Starter (Made in Japan)



MODEL	HARZ TU-33	HARZ TU-43
Engine Manufacturer	MITSUBISHI Heavy Industries	MITSUBISHI Heavy Industries
Engine Model	MHI TU33PSF	MHI TU43PSF
Piston Displacement (cc)	32.6	42.7
Output Power (hp)	1.3	1.7
Carburetor	MHI Japan (Float Type)	MHI Japan (Float Type)
Ignition System	Transistorized Flywheel Magneto	Transistorized Flywheel Magneto
Clutch System	Automatic Centrifugal	Automatic Centrifugal
Fuel Tank Capacity (L)	1.4	1.4
Lever Type	Throttle Lever	Throttle Lever
Main Pipe (mm)	Ø24 x 1450	Ø24 x 1450
Flexible Outer Shaft (mm/inch)	813 / 32	813 / 32
Flexible Inner Cable (mm/inch)	851 / 33.5	851 / 33.5
Dry Weight (kg)	9.8	10.5

\*\* against manufacturing defects not caused by operator