


FEATURES:

- 360° Swivel hook with stamping safety latch
- Rolled edge design to ensure smooth moving of hand chain
- Durable steel frame with heat treated load bearing components
- Roller bearings or caged ball bearings on load sprocket & side plate maximize efficiency and serviceability
- Automatic double-pawl braking system, safety and reliability
- Meets or exceeds EN13157 and other pertinent world standards

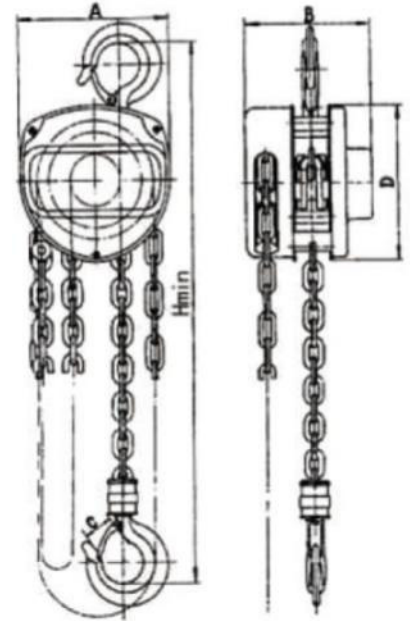

Model	Capacity (t)	Standard lift (m)	Running test load (T)	Headroom (mm) (H)	Load Chain G80		Effort required to lift max load (N)	Main Dimensions (mm)				Packing Size (cm)	Extra weight per meter of extra lift (kg)	G.W (kg)	N.W (kg)
					Falls of Chain	Dia (mm)		A	B	C	D				
HS-C0.5	0.5	3	0.75	255	1	6	221	125	111	24	134	28x21x17	1.7	10	8
HS-C1	1	3/5	1.5	306	1	6	304	147	128	28	154	30x24x18	1.7	13	10
HS-C1.5	1.5	3/5	2.25	368	1	8	343	183	141	34	192	34x29x20	2.3	20	16
HS-C2	2	3/5	3	444	2	6	314	147	126	34	154	33x25x19	2.5	17	14
HS-C3	3	3/5	4.5	486	2	8	343	183	141	38	192	38x30x20	3.7	28	24
HS-C5	5	3/5	6.25	616	2	10	383	215	163	48	224	45x35x24	5.3	45	36
HS-C8	8	3/5	10	700	3	10	392	356	162	64	210	62x50x28	7.3	83	68
HS-C10	10	3/5	12.5	700	4	10	392	360	163	64	224	62x50x28	9.7	83	68
HS-C16	16	3/5	20	820	6	10	392	400	196	69	210	68x60x34	14.1	127	112
HS-C20	20	3/5	25	100	8	10	392	585	191	82	224	70x46x75	19.4	194	156