







GEARED TROLLEY (GCL-AK)

PLAIN TROLLEY (GCT-AK)

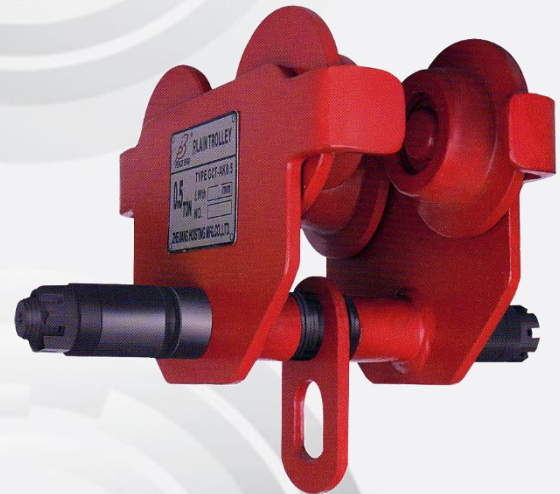

| GEARED TROLLEY | | | | | | | PLAIN TROLLEY | | | | |
|----------------|---------|---------|--------|--------|--------------------------|------|---------------|--------|---------|---------|---------|
| 10 | 5 | 3 | 2 | 1 | Capacity (ton) | | 1 | 2 | 3 | 5 | 10 |
| 122.58 | 61.29 | 44.13 | 29.42 | 14.71 | Test Load (KN) | | 14.71 | 29.42 | 44.13 | 61.29 | 122.58 |
| 2.0 | 1.3 | 1.2 | 1.0 | 0.9 | Min. Radius of Curve (m) | | 0.9 | 1.0 | 1.2 | 1.3 | 2.0 |
| 423 | 373 | 358 | 350 | 336 | A | A | 310 | 325 | 345 | 360 | 408 |
| 424 | 362 | 322 | 268 | 236 | B | B | 236 | 268 | 322 | 362 | 424 |
| 396 | 342 | 295 | 247 | 208 | C | C | 208 | 247 | 295 | 342 | 396 |
| 190 | 185 | 157 | 134 | 111 | H | H | 111 | 134 | 157 | 185 | 190 |
| 2-3.5 | 2-3.5 | 2-3.5 | 1.5-3 | 1.5-3 | F | F | 1.5-3 | 1.5-3 | 2-3.5 | 2-3.5 | 2-3.5 |
| 40 | 36 | 32 | 30 | 28 | S(≥) | S(≥) | 28 | 30 | 32 | 36 | 40 |
| 124-203 | 114-203 | 100-203 | 88-203 | 64-203 | I-Beam Width (mm) | | 64-203 | 88-203 | 100-203 | 114-203 | 124-203 |
| 88 | 42 | 29 | 18 | 13 | Weight (kg) | | 9.5 | 14.5 | 24.5 | 37.8 | 78.8 |

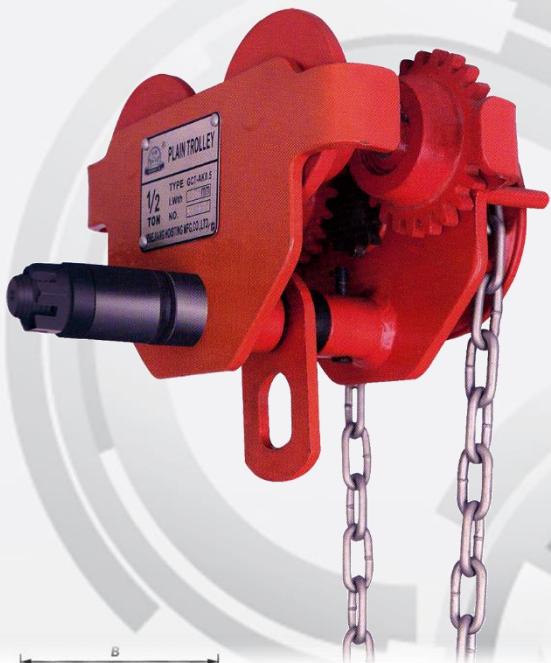