

DUCT HOSE


- ✚ Excellent Flexibility Characteristics
- ✚ Light Weight
- ✚ Easy Installation and Handling



Product Code	Nominal Diameter (mm)	Inner Diameter (mm)		Outer Diameter (mm)	Standard Weight (kg/m)	Standard Length (m)
DH 025	25 (1")	25.0	+1.5 -1.5	33.5	0.30	20
DH 032	32 (1-1/4")	31.8	+1.5 -1.0	40.0	0.38	20
DH 038	38 (1-1/2")	38.1	+1.5 -1.0	45.4	0.42	20
DH 050	50 (2")	50.8	+1.5 -1.0	60.5	0.45	20
DH 065	65 (2-1/2")	63.5	+1.5 -1.0	72.0	0.50	20
DH 075	75 (3")	76.2	+1.5 -1.0	84.5	0.65	20
DH 090	90 (3-1/2")	90.0	+1.5 -1.5	97.6	0.75	20
DH 100	100 (4")	101.6	+1.5 -1.5	111.5	0.85	20
DH 115	115 (4-1/2")	114.3	+1.5 -1.5	124.3	1.00	20
DH 125	125 (5")	127.0	+1.5 -1.5	137.0	1.05	20
DH 150	150 (6")	152.4	+1.5 -1.5	164.0	1.50	20
DH 175	175 (7")	175.0	+1.5 -1.5	191.5	1.80	20
DH 200	200 (8")	202.0	+1.5 -2.0	218.0	2.10	20
DH 250	250 (10")	252.0	+1.5 -2.0	267.5	3.00	20
DH 300	300 (12")	303.0	+1.5 -2.0	318.0	3.90	10

SUCTION HOSE

- ✚ Excellent Pressure Resistant
- ✚ Durable and High Abrasion Resistant
- ✚ Good Transparency
- ✚ Excellent for Fluid Conveyance
- ✚ Good Flexibility

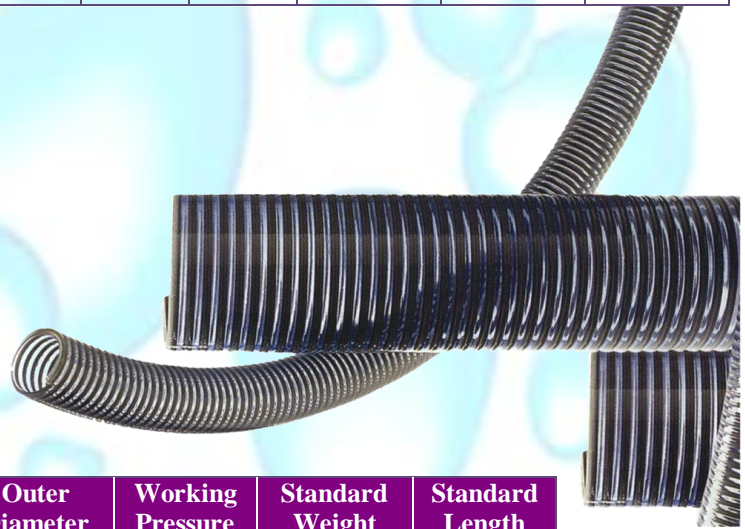

Product Code	Nominal Diameter (mm)	Inner Diameter (mm)		Outer Diameter (mm)	Working Pressure (kg/cm ²)	Standard Weight (kg/m)	Standard Length (m)
SH 025	25	25.0	+0.5 -0.5	33.0	7.0	0.43	20
SH 032	32	31.8	+0.6 -0.5	40.8	6.5	0.61	20
SH 038	38	38.1	+0.9 -0.5	48.1	6.5	0.81	20
SH 050	50	50.8	+0.9 -0.6	60.8	6.5	1.05	20
SH 065	65	63.5	+1.5 -0.7	73.5	5.0	1.26	20
SH 075	75	76.2	+1.5 -0.7	87.2	4.5	1.73	20
SH 090	90	89.0	+2.0 -0.7	100.0	4.0	2.30	20
SH 100	100	101.6	+2.0 -1.0	115.6	4.0	3.08	20
SH 125	125	127.0	+2.0 -1.0	141.0	3.0	3.71	20
SH 150	150	152.4	+2.0 -1.0	168.4	3.0	5.11	20

