

WEST LAKE DRILLING ~ TAPPING ~ MILLING



ZWG-4B



Z-406C



Z-516



ZQ-4113B



ZQ-4116-1



ZQ-4119




ZQD-4132

Model	ZWG-4B	Z-406C	Z-516
Max. drilling capacity	4 mm	6 mm	16 mm
Diameter of column	40 mm	50 mm	70 mm
Spindle travel	40 mm	65 mm	100 mm
Distance spindle axis to column surface	127 mm	140 mm	193 mm
Max. distance spindle nose to worktable	---	---	(MT.2:362) 318 mm
Max. distance spindle nose to base	170 mm	225 mm	(MT.2:592) 548 mm
Spindle taper	B10	B10	B18 or MT.2
Spindle speeds range	2800 – 9000 rpm	1400 – 5600 rpm	480 – 4100 rpm
Spindle speeds	3	3	5
Dimension of worktable surface	---	---	265 x 265 mm
Dimension of base worktable surface	180 x 175 mm	200 x 200 mm	250 x 300 mm
Overall height	618 mm	606 mm	1037 mm
Motor	150 w	250 w	550 w
Weight	22.5 kg	38 kg	86 kg

Model	ZQ-4113B	ZQ-4116-1	ZQ-4119	ZQD-4132
Max. drilling capacity	13 mm	16 mm	19 mm	31.5 mm
Diameter of column	70 mm	72 mm	70 mm	85 mm
Spindle travel	85 mm	85 mm	85 mm	110 mm
Distance spindle axis to column surface	180 mm	160 mm	180 mm	200 mm
Max. distance spindle nose to worktable	318 mm	450 mm	432 mm	490 mm
Max. distance spindle nose to base	475 mm	620 mm	592 mm	1240 mm
Spindle taper	B16	MT.2	MT.2	MT.3
Spindle speeds range	450 – 2650 rpm	180 – 2770 rpm	270 – 2880 rpm	150 – 2270 rpm
Spindle speeds	4	16	12	12
Dimension of worktable surface	Ø300 mm	Ø290 mm	Ø300 mm	Ø360 mm
Dimension of base worktable surface	220 x 220 mm	186 x 200 mm	220 x 220 mm	300 x 300 mm
Overall height	858 mm	970 mm	956 mm	1680 mm
Motor	370 w	370 w	550 w	750 w
Weight	59.5 kg	37 kg	63.5 kg	120 kg



WEST LAKE DRILLING ~ TAPPING ~ MILLING

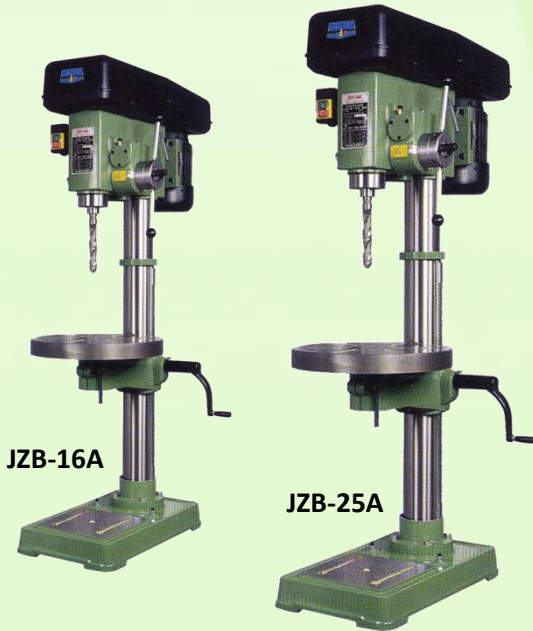

JZB-16A

JZB-25A

Model	JZB-16A	JZB-25A
Max. drilling capacity	16 mm	25 mm
Diameter of column	85 mm	102 mm
Spindle travel	100 mm	130 mm
Distance spindle axis to column surface	180 mm	230 mm
Max. distance spindle nose to worktable	425 mm	750 mm
Max. distance spindle nose to base	610 mm	990 mm
Spindle taper	MT.2	MT.3
Spindle speeds range	290 – 2000 rpm	230 – 2160 rpm
Spindle speeds	6	6
Spindle power feeds	0.1,0.14,0.17,0.25 mm/r	0.1,0.16,0.25 mm/r
Dimension of worktable surface	Ø420 mm	Ø420 mm
Dimension of base worktable surface	245 x 245 mm	260 x 260 mm
Overall height	1050 mm	1560 mm
Motor	750 w	1500 w
Weight	125 kg	188 kg



JZS-16

JZS-25B



SWJ-6A



SWJ-12A



SWJ-16A

Model	JZS-16	JZS-25B	SWJ-6A	SWJ-12A	SWJ-16A
Max. tapping capacity (Cast iron / Steel)	M16 / M12	M24 / M22	M6 / M5	M12 / M8	M16 / M12
Max. drilling capacity	16 mm	25 mm	---	---	---
Diameter of column	85 mm	102 mm	60 mm	60 mm	73 mm
Spindle travel	93 mm	130 mm	40 mm	45 mm	50 mm
Distance spindle axis to column surface	180 mm	230 mm	127 mm	127 mm	183 mm
Max. distance spindle nose to worktable	425 mm	750 mm	231 mm	220 mm	450 mm
Max. distance spindle nose to base	610 mm	990 mm	---	---	---
Spindle taper	MT.2	MT.3	B12	B16	B18
Spindle speeds range	160 – 1820 rpm	160 – 1880 rpm	480,850/260-750rpm 580,1050/320-930rpm		240-570rpm 275-650rpm
Spindle speeds	9	9	---	---	---
Dimension of worktable surface	270 x 280 mm	340 X 360 mm	Ø230 mm	Ø245 mm	Ø320 mm
Dimension of base worktable surface	245 x 245 mm	260 x 260 mm	---	---	---
Overall height	1050 mm	1560 mm	815 mm	825 mm	1230 mm
Motor	750 w	1500 w	370 w	370 w	750 w
Weight	108 kg	193 kg	43 kg	48 kg	102 kg



WEST LAKE DRILLING ~ TAPPING ~ MILLING




Model	ZS-5032
Max. tapping capacity (Cast iron / Steel)	M30 / M24
Max. drilling capacity	31.5 mm
Spindle travel	120 mm
Distance spindle axis to column surface	277.5 mm
Max. distance spindle nose to worktable	690 mm
Max. distance spindle nose to base	1200 mm
Spindle taper	MT.3
Spindle speeds range	52 – 560 rpm
Spindle speeds	6
Dimension of worktable surface	405 x 360 mm
Dimension of base worktable surface	405 x 360 mm
Headstock travel	360 mm
Motor	1100 w
Weight	350 kg




ZS-5032



T108
T121

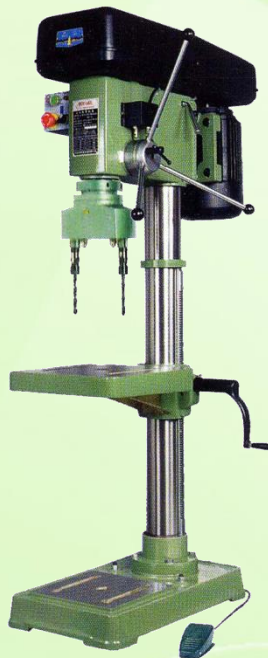

JZS-16



A116
A124



JZS-25

TYPE	T108	T121	A116	A124
Min. distance two spindles	18 mm	24 mm	18 mm	26 mm
Max. distance two spindles	108 mm	121 mm	100 mm	124 mm
Max. drilling capacity	6 mm	11 mm	6 mm	11 mm
Number of spindle	2	2	2 ~ 4	2 ~ 4
Chuck type	Collet chuck	Collet chuck	Collet chuck	Collet chuck
Suitable drilling machine	JZS-16 and JZS-25			



WEST LAKE DRILLING ~ TAPPING ~ MILLING



ZX-7032



ZX-40



ZX-7045

Model	ZX-7032	ZX-40	ZX-7045
Max. tapping capacity (3 Phase only)	M12	M12	M12
Max. drilling capacity (Cast iron / Steel)	31.5 mm	31.5 mm / 22 mm	45 mm / 28 mm
Width of face milling	80 mm	80 mm	80 mm
Diameter of vertical milling	22 mm	28 mm	28 mm
Spindle travel	130 mm	120 mm	120 mm
Distance spindle axis to column surface	202 mm	272.5 mm	260 mm
Max. distance spindle nose to worktable	450 mm	450 mm	475 mm
Spindle taper	MT.3 or R8	MT.3 or R8	MT.4
Spindle speeds range	100 – 2150 rpm	95 – 1600 rpm	95 – 1600 rpm
Spindle speeds	12	6	6
Dimension of table	730 x 210 mm	730 x 210 mm	820 x 240 mm
Travel of worktable	500 x 175 mm	500 x 175 mm	550 x 200 mm
Overall height	1100 mm	1100 mm	1040 mm
Headstock travel	315 mm	350 mm	410 mm
Motor	1500 w	750 w	750 w
Weight	285 kg	275 kg	270 kg

